










4.0 CONNECTED

THE 4TH INDUSTRIAL REVOLUTION IS HERE

MODEL

- HMI with latest generation software
- Company network connection following the 4.0 Industry parameters
- Live monitoring of functional parameters
- Predictive maintainence
- Zero risk of machine downtime
- Maximum work efficiency
- Control of the emissions into the atmosphere
- Tax benefits (according to regulations in force in the specific country)

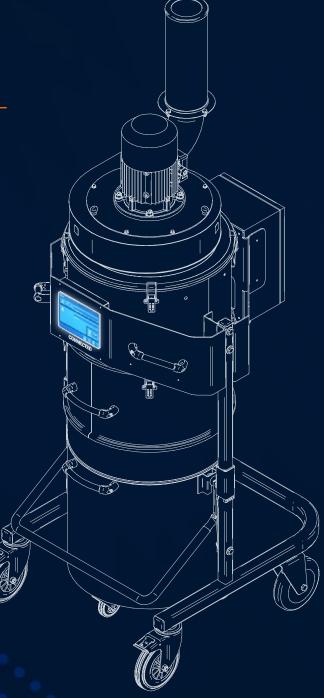







REMOTE MONITORING 4.0

A simple and intuitive dashboard shows in real time the operating parameters of 4.0 Connected vacuum cleaners



NO MORE MACHINE DOWNTIME

The remote monitoring is able to forsee any malfunction or maintenance to be carried out before any machine downtime occurs



REAL-TIME ASSISTANCE

Once the problem is detected, iVision customer assistance will contact you directly to offer support



CLEANER AIR

The double filtering stage purifies the suctioned air from the finest particles, potentially harmfull to the health of operators, before releasing clean air back into the working environment

Industrial vacuum cleaner

SHOES 160

INDUSTRIAL VACUUM CLEANER FOR LEATHER AND FABRIC DUST

The SHOES 160 litres vacuum cleaner is an excellent system used in the shoemaking world for the industrial extraction of chips, dust or waste generated by grinding, carding or brushing machines. The Vacuum cleaners of the SHOES line cover almost all of chip extraction needs on machine tools in the shoe production world and leather and fabric processing, combining the attention and care of design with simple and sturdy materials.



SHOES 160

| Also available in the 4.0 CUNNECTED version | | 5110-25-100 | | | |
|---|----------|-------------|------------|--|--|
| Product code | | | | | |
| POWER | Kw | 3 | 4 | | |
| FREQUENCY | Hz | 50 | 50 | | |
| SUPPLY VOLTAGE ¹ | V | 400 | 400 | | |
| MAXIMUM NEGATIVE PRESSURE | mbar | 28 | 60 | | |
| MAXIMUM AIR FLOW RATE | m³/h | 3500 | 2200 | | |
| INLET DIAMETER | ømm | 160 | 100 | | |
| NUMBER OF INLETS | n | 2 | 2 | | |
| CONTAINER CAPACITY | Lt | 160 | 160 | | |
| DIMENSION | HxLxW cm | 180*135*84 | 207*140*97 | | |
| WEIGHT | Kg | 180 | 205 | | |
| FILTER ² | - | Class M | Class M | | |

| OPTIONAL | |
|--|--|
| Antistatic Kit | |
| Fire-retardant kit | |
| Start & stop | |
| Version with cartridge and cleaning with counterflow air | |
| Touch Screen | |
| Atex 22 Version | |

| CONNECTION KIT |
|----------------------|
| 1 Connection fitting |
| 2 Hose clamp (2 Pcs) |
| 3 Hose |

¹ Other voltages and frequencies available upon request

²Other filter media available upon request

Industrial vacuum cleaner

Also available in the 4.0 CONNECTED version

SHOES 320

INDUSTRIAL VACUUM CLEANER FOR LEATHER AND FABRIC DUST

The SHOES 320 litres vacuum cleaner is an excellent system used in the shoemaking world for the industrial extraction of grinding, carding or brushing machines. Vacuum cleaners in the SHOES line basically cover all of the chip extraction needs on machine tools in the shoe production world and from leather and fabric processing, combining the attention and care of design with simple and sturdy materials. The use of a cyclonic pre-filter captures more than 90% of the suctioned material before it reaches the main filter, thus preventing it from clogging and considerably extending its life.



SHOES 320

| 7 1130 dvallable III tile 410 dollitedieb | VETSIOTI | | | |
|---|----------|-------------|-------------|-------------|
| Product code | | | | |
| POWER | Kw | 3 | 4 | 5,5 |
| FREQUENCY | Hz | 50 | 50 | 50 |
| SUPPLY VOLTAGE ¹ | V | 400 | 400 | 400 |
| MAXIMUM NEGATIVE PRESSURE | mbar | 28 | 60 | 70 |
| MAXIMUM AIR FLOW RATE | m³/h | 3500 | 2200 | 2500 |
| INLET DIAMETER | ømm | 160 | 100 | 160 |
| NUMBER OF INLETS | n | 1 | 1 | 1 |
| CONTAINER CAPACITY | Lt | 320 | 160 | 160 |
| DIMENSION | HxLxW cm | 254*182*162 | 254*182*162 | 254*182*162 |
| WEIGHT | Kg | 440 | 440 | 440 |
| FILTER ² | - | Class M | Class M | Class M |

| OPTIONAL |
|--|
| Antistatic kit |
| Fire-retardant kit |
| Start & stop |
| Version with cartridge and cleaning with counterflow air |
| Touch screen |

| CONNECTION KIT |
|----------------------|
| 1 Connection fitting |
| 2 Hose clamp (2 Pcs) |
| 3 Hose |

¹Other voltages and frequencies available upon request

²Other filter media available upon request